

Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com www.AHSystems.com

SAS-543 High Power, Biconical Antenna 20 MHz – 300 MHz

High input handling capability up to 2000 watts CW, and rugged design make this Biconical Antenna excellent for immunity testing.





Frequency Range: 20 MHz - 300 MHz Antenna Factor: 7.4 to 20 dB Gain: -14 to 2.8 dBi Maximum Continuous Power: 1 KW Max Peak Power: 2 KW Max Radiated Field: 200 V/m (80 MHz - 200 MHz) Pattern Type: omni-directional Impedance: 50  $\Omega$ VSWR: 2.8:1 Connector: N-Type, female Mounting: 1/4-20 Thread, female


## Features

- Frequency Range of 20 MHz to 300 MHz
- Omni Directional, Receive and Transmit
- Individually Calibrated (1, 3 and 10 Meter calibration included, horizontal polarization)
- Rugged Construction
- Three Year Warranty

The SAS-543 Biconical Antenna is an ideal solution for immunity testing and capable of generating a high fields at lower frequencies. The Biconical antenna has a unique balun design an ideal for IEC 1000-4-3 testing or any other immunity testing. The rugged design of this biconical antenna has an impedance transformation and matching circuit capable of handling up to 2 KW peak power. This Biconical antenna is a versatile performer for all your compliance testing needs.

## **Recommended Accessories**

- ATU-510 (Antenna Tripod, Wooden)
- AEH-510 (Azimuth and Elevation Head)
- SAC-213 (3 Meter N/N Cable)

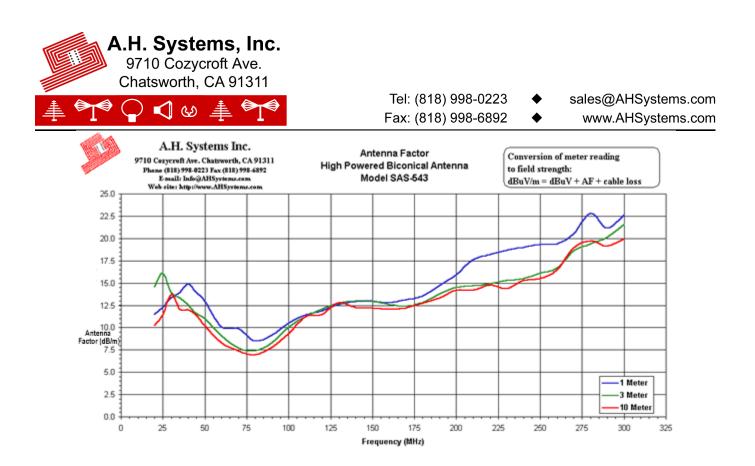

## Physical Dimensions:

Height: 17 in. (43.2 cm) Width: 52.5 in. (133 cm) Weight: 6.0 lb.'s (2.72 kg)