

Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com www.AHSystems.com

SAS-570 Double Ridge Guide Horn Antenna 170 MHz – 3 GHz

High gain, low VSWR, input handling capability up to 800 watts CW, and rugged design make this horn antenna excellent for both immunity and emissions testing.



Frequency Range: 170 MHz - 3 GHz Antenna Factor (1 Meter): 11 to 33 Gain (dBi): 0 to 10.9 Maximum Continuous Power: 800 Watts Impedance: 50  $\Omega$ Max Radiated Field: 200 V/m 500 V/m (with Optional 7/16 DIN female connector) Connector: N-Type, female

Mounting Base: 1/4 - 20 Thread, female




## Features

- Broad Frequency Range of 170 MHz to 3 GHz
- Linearly Polarized High Gain, Low VSWR
- Individually Calibrated at 1 Meter Horizontal and Vertical Polarity
- Optional 7/16 Input connector available for increased power capability
- Three year Warranty

The A.H. Systems' Double Ridged Guide Horn is a broadband antenna that offers excellent performance over the frequency range of 170 MHz - 3 GHz. High gain, low VSWR, input handling capability up to 800 watts CW and rugged design make this horn antenna excellent for both immunity and emissions testing.

## **Recommended Accessories**

- ATU-510 (Antenna Tripod)
- AEH-511 (Azimuth and Elevation Head)

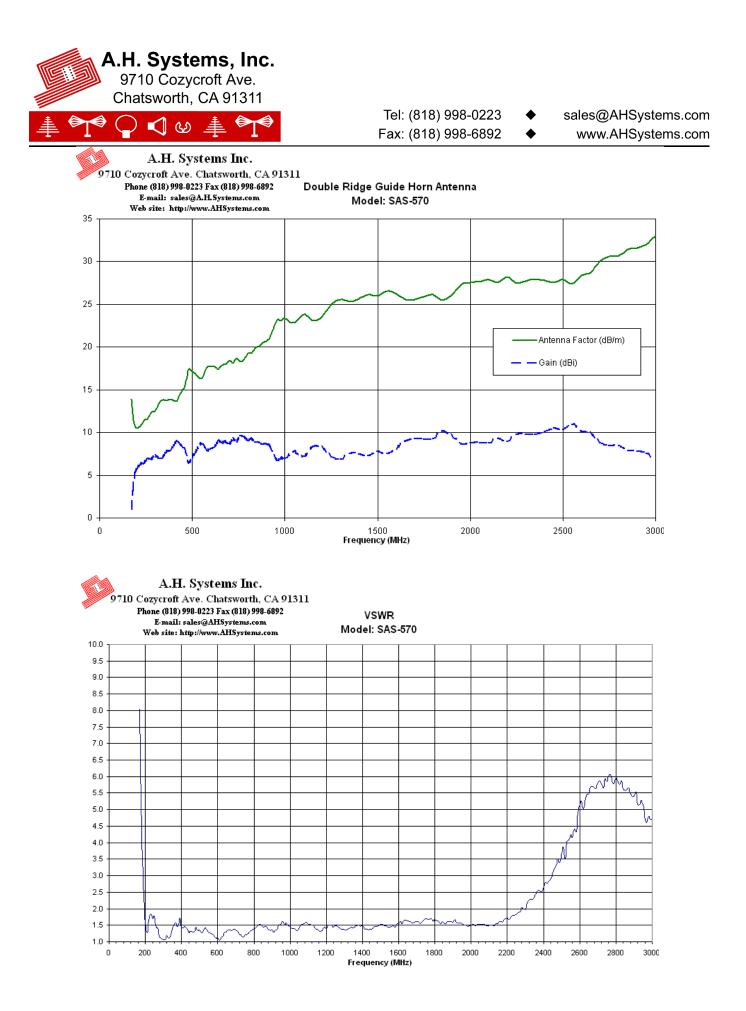





## Tel: (818) 998-0223

Fax: (818) 998-6892

٠

sales@AHSystems.com www.AHSystems.com



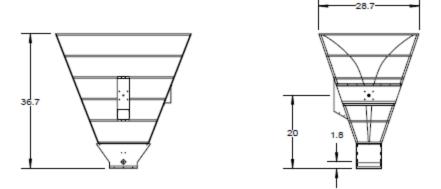

## **Physical Dimensions:**

Length:36.7 in. (93.2 cm) Width:28.7 in. (72.9 cm) Height:38.5 in. (97.8 cm) Weight:22.5 lb.'s (10.21 kg)

Aperture:27.2" x 37.2" (69cm x 94.5cm)