

Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com www.AHSystems.com

SAS-571 Double Ridge Guide Horn Antenna 700 MHz – 18 GHz

High gain, low VSWR, input handling capability up to 300 watts CW, and rugged design make this horn antenna excellent for both immunity and emissions testing.



Frequency Range: 700 MHz – 18 GHz Antenna Factor (1 Meter): 22 to 44 Gain (dBi): 1.4 to 15 Maximum Continuous Power: 300 Watts Max Radiated Field: 200 V/m 3 dB Beamwidth (E-Field): 48° (average) 3 dB Beamwidth (H-Field): 30° (average) Impedance: 50 Ω Average VSWR: < 2:1 (3.5:1 max) Connector: N-Type, female Mounting Base: $\frac{1}{4}$ - 20 Thread, female

Features


- Broad Frequency Range of 700 MHz to 18 GHz
- Linearly Polarized High Gain, Low VSWR
- Individually Calibrated at 1, 3 and 10 Meter Horizontal Polarity
- Three year Warranty



The SAS-571 Double Ridge Guide Horn Antenna is lightweight, compact and has been manufactured for maximum gain, low VSWR and broadband response. The double ridge guide horn antenna was initially designed for surveillance where a high gain broadband response was required. The original design was to have a 30-degree beamwidth, which is ideal for EMI measurements and compliance testing.

Recommended Accessories


- PAM-0118P (preamplifier)
- SAC-18G-3 (3 Meter High-Frequency, Low-Loss Cable)
- ATU-510 (Antenna Tripod)
- ATU-514 (Tripod, non-metallic)



Tel: (818) 998-0223 Fax: (818) 998-6892

4

sales@AHSystems.com www.AHSystems.com

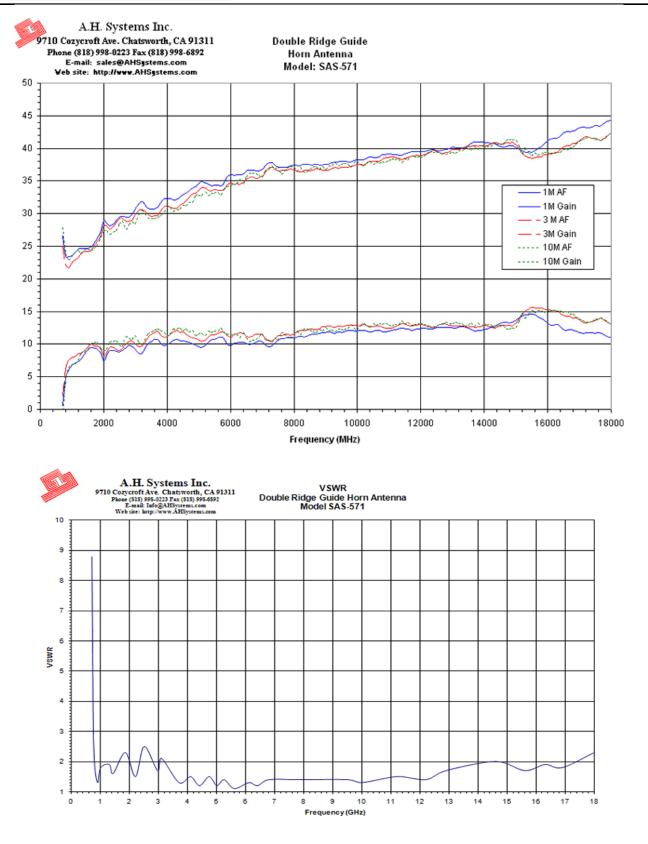




Tel: (818) 998-0223

۰

Fax: (818) 998-6892

sales@AHSystems.com www.AHSystems.com

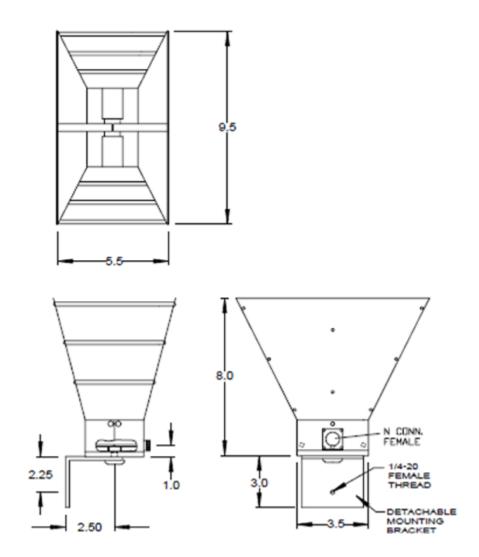

Physical Dimensions:

Length: 8 in. (20.3 cm) Width: 5.6 in. (14.2 cm) Height: 9.6 in. (24.4 cm) Weight: 3.5 lb.'s (1.59 kg)

Aperture: 5.5" x 9.6" (13.9cm x 24.4cm)