



RF/EMI Shielding Tabletop Enclosure

Control radio frequency and electromagnetic interference (RF/EMI) with Select Fabricator's Tabletop Enclosure. Lightweight fabric test boxes are a low cost and high performance shielding solution. Soft wall chambers and test boxes are easy to assemble, transport, and store. Tested independently to IEEE 299 standards, Select Fabricators Tabletop Enclosures exceed -90 dB shielding effectiveness.

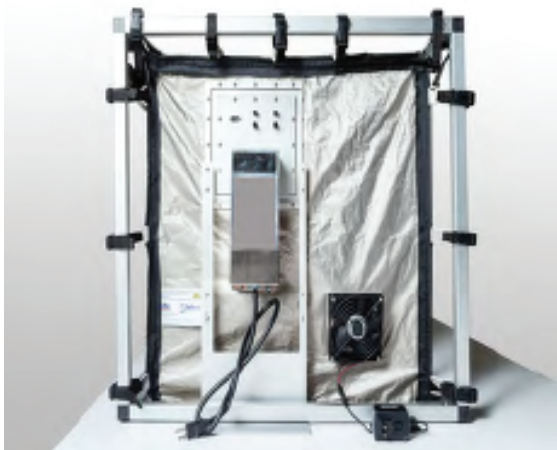

Construction

Made in the USA, these shielded boxes are made from Nova SelectTM, a durable, high attenuating, silver/copper/nickel plated nylon. Berry compliant Nova SelectTM also available. The tent like structure is supported by an easy to assemble square, aluminum frame.

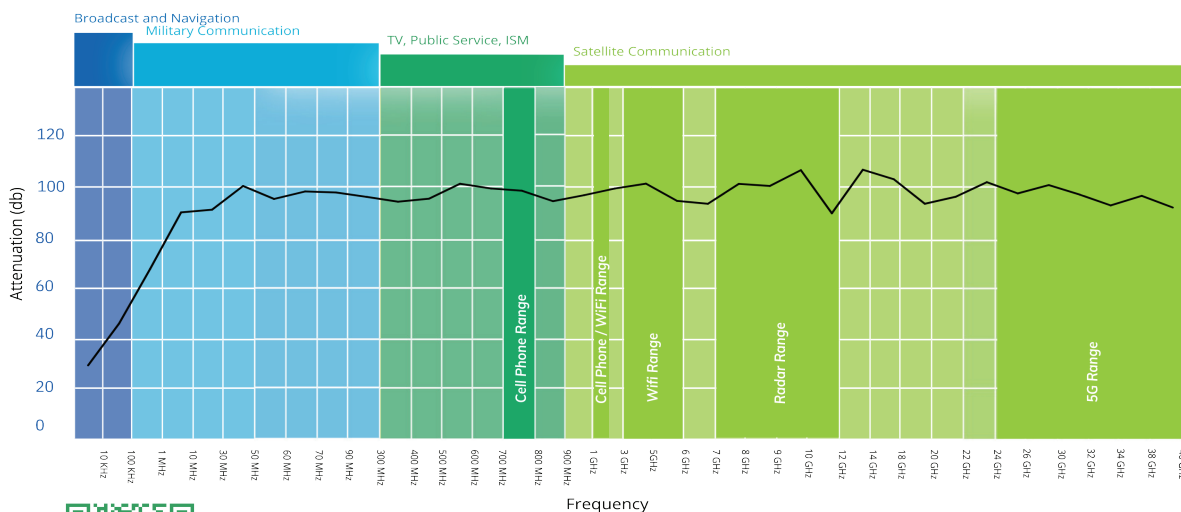

Scan To View On Website

Applications

EMC Testing

Small Electronics
Shielding

Wireless Device
Testing

RFID Isolation

RF/EMI Shielding Tabletop Enclosure

Lightweight and Portable



Series 600 Frame

Square, heavy duty, aluminum frame. Button hole locking connection minimizes assembly time.



Integrated Fan

Optional ventilation provided by RF shielded honeycomb vents and fan. The unit is designed to provide air circulation while suppressing unwanted RF/EMI interference.



Patented Door Closure System

Using two strips of heavy-duty flexible magnet to create a tight conductive seal, allows attenuation levels to exceed -90 dB. Single door (US Pat 9,029,714) or double door (US Pat 8,530,756)



IO Filter and Panels

Integrated IO filter plates with standard or high-performance power filters. Can include filtration for Ethernet, USB, SMA, BNC, N-type, Fiber Optics, and more.



Scan To View On Website

Specifications

- Patented double magnet door
- Heavy duty tarp flooring to protect the conductive floor
- Protective tent carry/storage bag
- Series 600 Frame
- Shielding Effectiveness Certificate
- Complete assembly instructions
- One-year limited warranty

Construction

- Flame retardant/resistant liner
- ESD liner to provide static control
- Sound reduction/absorbing lining and sound masking systems
- Exterior covers for outdoor deployment
- Custom size door
- Shielded Windows
- Single or double layer of shielding fabric

Transport

- Pelican storage cases
- Canvas carry bag
- Frame cases

Other

- RF / microwave absorbing foam
- I/O filter plates
- EMI hardened lights
- In-house or independent IEEE 299 1-18 GHz testing of completed enclosure
- Custom engineering/design of enclosure

Standard Tabletop Sizes

Length	Width	Height
24"	24"	24"
36"	36"	36"
48"	48"	48"
36"	24"	24"
48"	24"	24"
(Usable Internal Space)		